IFUME 400i OZONE




Moderate, ozone only application extraction



Description & features

- Full colour touch screen display
- Highest grade HEPA and carbon technology
- Automatic electronic flow control maintains a constant extraction rate even as the filter blocks
- Gas and particle sensors to warn the operator
- Operate worldwide with no loss of performance
- Specialized coating to prevent corrosion

Filters

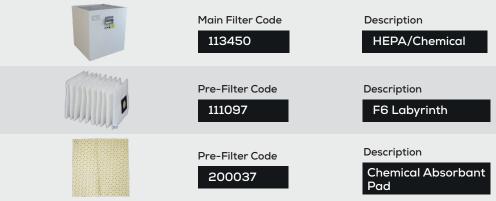

Specification

Voltage	100v - 230v
Vacuum Part Number	1704132
Wattage	1.1kW
Frequency	50Hz / 60Hz
Cabinet Height	1195mm
Cabinet Width	465mm
Cabinet Depth	528mm
Cabinet Weight	70kg
Airflow	400m3/h
Sound Level	<60dBa

Machine supplied with

• 1 x Main Filter • 1 x Pre-filter • 1 x Absorbant Pad • 1 x Connection Kit • 1 x Power Cable • 1 x Manual • 1 x FMU monitor unit

IFUME 400i OZONE

Options

Moderate, ozone only application extraction


The ozone FMU will detect Ozone only and no other contaminants

Filter Monitor Unit



Code 400470 Description
Ozone FMU

Connection kits





Interfacing

Interfacing can remotely start the Purex machine when the connected machine starts.

Interfacing can also warn the connected machine when the Purex machine is in alarm.

Your Machine 

Take a look through our Interfacing Guide to see our extensive range of options