

400

Compact, multi-use fume extraction unit

PUREX


CLEAN AIR FOR EVERYONE



Description & features

- Clear & information graphic display
- Highest grade HEPA and carbon technology
- Automatic electronic flow control - maintains a constant extraction rate even as the filter blocks
- Gas and particle sensors to warn the operator
- Adjustable airflow

Filters



Main Filter Code

113505PU

Description

HEPA/Chemical



Pre-Filter Code

200025

Description

F5 Pad

Specification

Voltage	120v	230v
Volume Part Number	OLX4001D	OLX4000D
Vacuum Part Number	080411D	080410D
Wattage	1.2kW	
Frequency	50Hz / 60Hz	
Cabinet Height	710mm	
Cabinet Width	465mm	
Cabinet Depth	528mm	
Cabinet Weight	60kg	
Airflow	400m ³ /h	
Sound Level	<60dBa	

Machine supplied with

• 1 x Main Filter • 1 x Pre-filter • 1 x Connection Kit • 1 x Power Cable • 1 x Manual

Find out more: Wpurex.co.uk | [T +44 \(0\)1405 746030](tel:+44(0)1405746030) | [E purex@purex.co.uk](mailto:purex@purex.co.uk)

Registered Office: Purex International Limited, QWP House, Island Drive, Capitol Park, Thorne, Doncaster DN8 5UE
Registered No. 5136616 England | VAT No. GB842 5025 49 | WEEE Producer Registration Number: WEE/CE0067TX
*Goods are subject to change | *Illustrations are 3D created visual representations

400

Compact, multi-use fume extraction unit

Options

Main filter

Code	Description
113508	Chemical
113505P	Chemical
113809	HEPA
113662	CSA Chemical
113579	HEPA / Twin Chemical
113668	HEPA / Twin Chemical
113512	HEPA / Chemical (Cleanroom)
113669	HEPA / Chemical (Cleanroom)
113505H	HEPA (Hydrophobic)
113513	Solvent Lock
113531	Pleated Bag

Pre-filter

200524	F8 / F9 Pad
--------	-------------

Connection kits

If you do not see a connection kit that fits your machine or pipework, please contact Purex or your representative


Code	Hose End Diameter	Hose Length	Purex Inlet Diameter
100032	50mm	3m	80mm
100043	50mm	6m	80mm
100171	125mm	3m	80mm
120288	100mm	2.3m	80mm
120297	100mm	2m	80mm
120299	80mm	3m	80mm

Each kit includes a diagram showing the connection to the Purex machine inlet. For example, kit 100032 shows a 3.0m hose connecting to a 50mm diameter pipe/port or Purex valve. Kit 100171 shows a 2.5m hose connecting to a 125mm diameter pipe/port and a 0.5m hose connecting to the Purex valve.

Interfacing

Interfacing can remotely start the Purex machine when the connected machine starts.

Interfacing can also warn the connected machine when the Purex machine is in alarm.

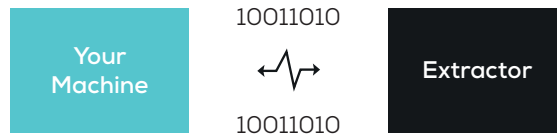

Take a look through our Interfacing Guide to see our extensive range of options